

18GHZ STAINLESS REVERSE POLARITY SMA MALE TO GOLD SMA FEMALE ADAPTER P/NO.STI01-0231



SPECIFICATION


Frequency	DC-18GHz
VSWR:	1.3:1(Max.)
Insertion Loss:	0.15dB(Max.)
Impedance:	50Ohm
Durability:	500 Cycles
Temperature:	-65~155°C

MATERIAL LIST

Part	Material	Plated
Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	PTFE	
C-ring	Beryllium Copper	
Gasket	Silicon	
Shell	Stainless Steel	Passivated

OUTLINE DRAWING

Tolerance: X=±0.2 X.X=±0.1 X.XX=±0.05 Unit:mm

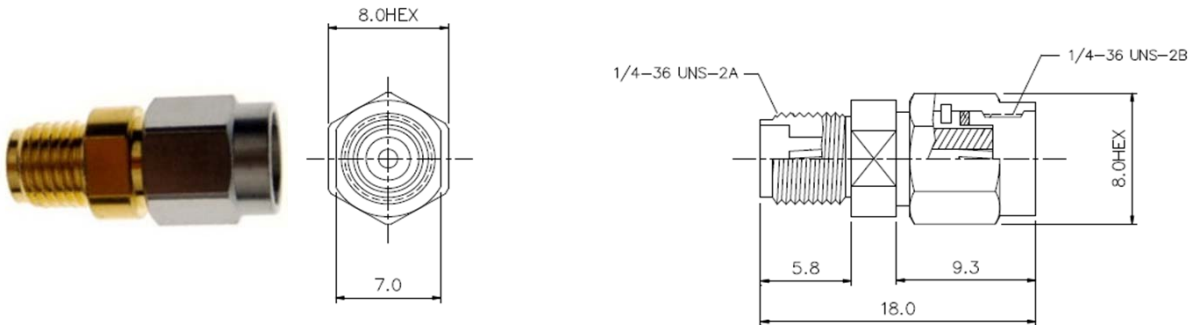

TESTING DATA (100% S-PARAMETER TESTED)

