

**4GHZ FIXED ATTENUATOR**  
**N MALE TO N FEMALE RATED TO 25W**  
**P/NO.STI02-2404-XX**



**SPECIFICATION**


Frequency	DC-4GHz
Attenuation Value:	3,6,10,20,30dB
Attenuation Accuracy:	3,6dB:± 0.5dB 10dB:± 0.6dB 20dB:± 0.7dB 30dB:± 0.8dB
VSWR:	1.2:1(Max.)
Power :	25W Avg. 5KW Peak
Impedance:	50Ohm
Durability:	500 Cycles

**MATERIAL LIST**

Part	Material	Plated
Outer Conductor	Brass	Nickel
Center Conductor	Brass	Gold
Housing	Aluminum	Black

**OUTLING DRAWING**

Unit:mm

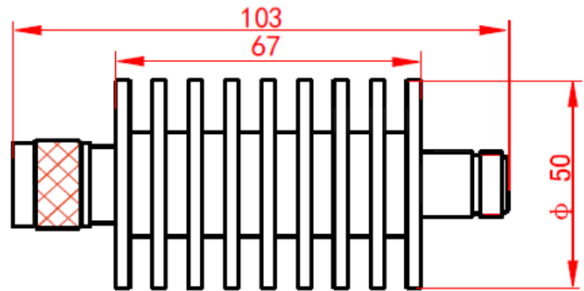

**TESTING DATA ( 100% S-PARAMETER TESTED)**

