



### 4GHZ FIXED ATTENUATOR

### N MALE TO N FEMALE RATED TO 2W

### P/NO.STI02-2800-XX



#### SPECIFICATION

Frequency	DC-4GHz
Attenuation Value:	3,5,6,10,20,30,40dB
Attenuation Accuracy:	3,5,6dB:± 0.5dB
	10,20dB:± 0.6dB
	30dB:± 0.8dB
	40dB:± 1.0dB
VSWR:	1.2:1(Max.)
Power :	2W Avg. 200W Peak
Impedance:	50Ohm
Durability:	500 Cycles


#### MATERIAL LIST

Part	Material	Plated
Body	Brass	Nickel
Center Conductor	Brass	Gold

#### OUTLING DRAWING



Unit:mm

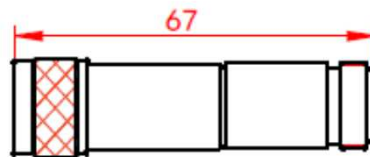

#### TESTING DATA ( 100% S-PARAMETER TESTED)

