

40GHZ FIXED ATTENUATOR

2.92MM MALE TO 2.92MM FEMALE RATED TO 2W

P/NO.STI02-6201-XX




SPECIFICATION

Frequency	DC-40GHz
Attenuation Value:	1,3,6,10,20,30dB
Attenuation Accuracy:	1,3,6,10dB:± 0.7dB 20dB:± 0.8dB 30dB:± 1.0dB
VSWR:	1,3,6,10,20dB:1.25:1(Max.) 30dB:1.3:1(Max.)
Power :	Avg.2W @25°C (Derated Linearly to 0.2Watts @ 125°C) Peak 20W
Impedance:	50Ohm
Durability:	500 Cycles
Operating Temp.:	-55~125°C

MATERIAL LIST

Part	Material	Plated
Body	Stainless Steel	
Center Conductor	Phosphor Bronze/Beryllium Copper	Gold

OUTLING DRAWING

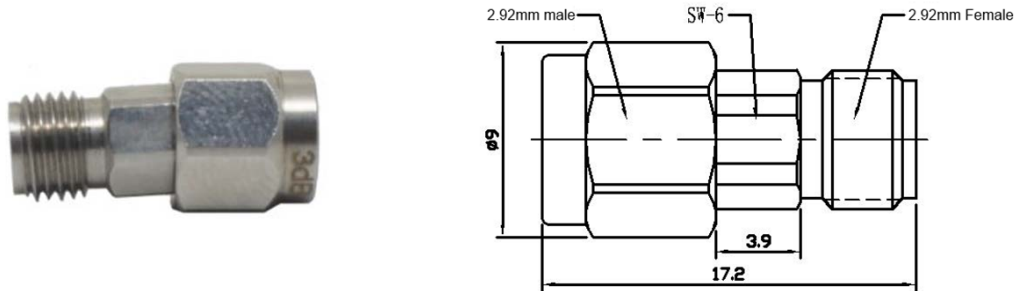

TESTING DATA (100% S-PARAMETER TESTED)

