



SOLVANG TECHNOLOY INC.

www.solvangtech.com

Email : sales@solvangtech.com

0.85-0.95GHZ 2WAY SMA POWER DIVIDER

RATED TO 20W

P/NO.STI08-0027



SPECIFICATION


Frequency	850~950MHz
Isolation:	24dB(Min.)
Insertion Loss:	0.4dB(Max.)(excluding Theoretical Loss:3.0dB)
VSWR:	1.2:1(Max.)
Power :	20W(Max.)
Amplitude Unblance:	±0.2dB(Max.)
Phase Unblance	±2°(Max.)
Impedance:	50Ohm
Durability:	500 Cycles
Operating Temp.:	-40~75°C

MATERIAL LIST

Part	Material	Plated
Center Conductor	Brass	Gold
SMA Body	Brass	Gold
Housing	Aluminum	Black

OUTLING DRAWING

Unit:mm

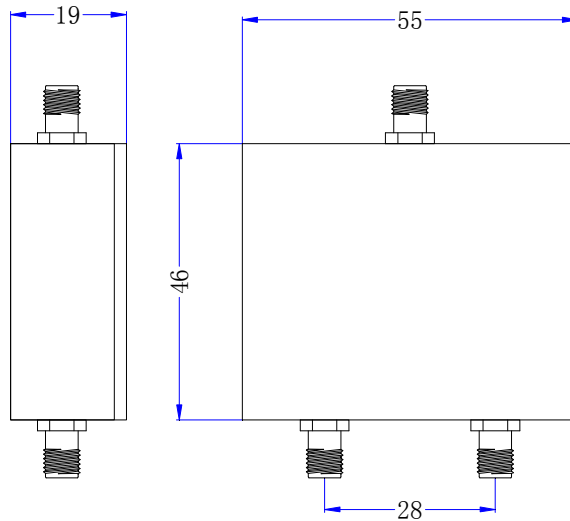

Size Tolerance:±0.3mm

Any more request, please contact sales@solvangtech.com. Thank you ~