



SOLVANG TECHNOLOY INC.

www.solvangtech.com

Email : sales@solvangtech.com

0.85-0.95GHZ 4WAY SMA POWER DIVIDER

RATED TO 20W

P/NO.STI08-0028



SPECIFICATION


| | |
|----------------------|---|
| Frequency | 850~950MHz |
| Isolation: | 24dB(Min.) |
| Insertion Loss: | 0.4dB(Max.)(excluding Theoretical Loss:6.0dB) |
| VSWR: | 1.2:1(Max.) |
| Power : | 20W(Max.) |
| Amplitude Unbalance: | ±0.2dB(Max.) |
| Phase Unbalance | ±2°(Max.) |
| Impedance: | 50Ohm |
| Durability: | 500 Cycles |
| Operating Temp.: | -40~75°C |

MATERIAL LIST

| | | |
|------------------|----------|--------|
| Part | Material | Plated |
| Center Conductor | Brass | Gold |
| SMA Body | Brass | Gold |
| Housing | Aluminum | Black |

OUTLING DRAWING

Unit:mm

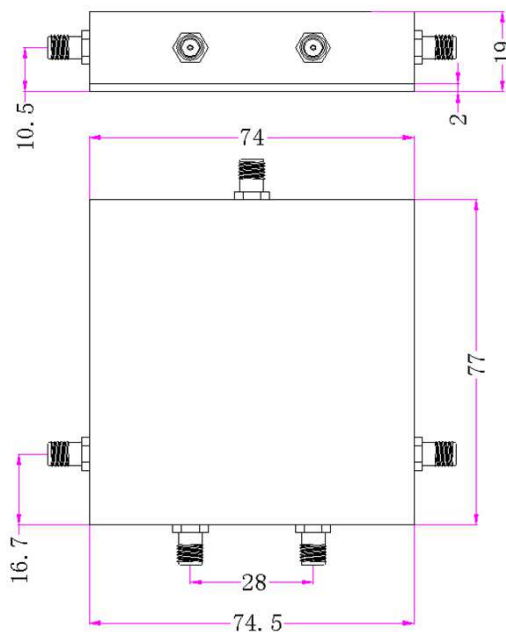

Size Tolerance:±0.3mm

Any more request, please contact sales@solvangtech.com. Thank you ~