

0.5-6GHz 4WAY SMA POWER DIVIDER

RATED TO 20W

P/NO.STI08-0030



SPECIFICATION


Frequency	0.5-6GHz
Isolation:	15dB(Min.)@0.5-0.7GHz, 18dB(Min.)@0.7-6GHz
Insertion Loss:	1.8dB(Max.)(excluding Theoretical Loss:6.0dB)
VSWR:	1.5:1(Max.)
Power :	20W(Max.)
Amplitude Unbalance:	±0.5dB(Max.)
Phase Unbalance:	±5°(Max.)
Impedance:	50ohm
Durability:	500 Cycles
Operating Temp.:	-40~80°C

MATERIAL LIST

Part	Material	Plated
Center Conductor	Beryllium Copper	Gold
SMA Body	Brass	Gold

OUTLING DRAWING

Unit:mm(inch)

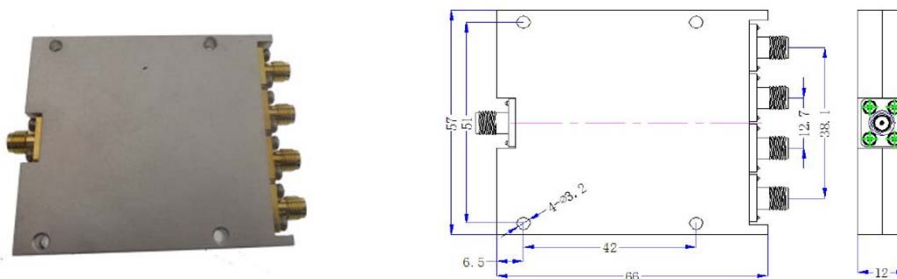

TESTING DATA (100% S-PARAMETER TESTED)

