

30MHZ-6GHZ SMA(M-F) INNER D.C. BLOCK /STAINLESS STEEL P/NO.STI09-0004



SPECIFICATION


Frequency	30MHz-6GHz
Insertion Loss:	0.5dB(Max.)
VSWR:	1.25:1(Max.)
DC Input Voltage:	50V(Max.)
Power:	2W
Impedance:	50Ohm
Durability:	500 Cycles
Temperature:	-40°C ~ 70°C

MATERIAL LIST

Part	Material	Plated
Housing	Stainless Steel	
Center Conductor	Brass /Beryllium Copper	Gold
Insualtor	Teflon	

OUTLING DRAWING

Unit:mm

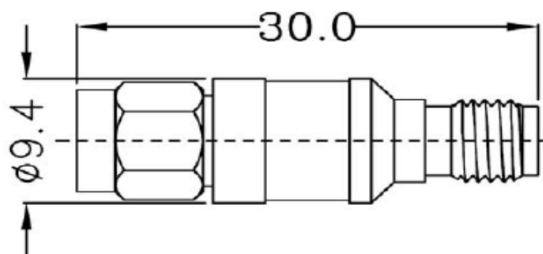

TESTING DATA (100% S-PARAMETER TESTED)

