

40HZ 1W 2.92MM MALE

TERMINATION

P/NO.STI11-0017




SPECIFICATION

Frequency	DC-40GHz
VSWR	1.25:1(Max.)
Impedance:	50Ohm
Power:	1W(Avg.)@25°C (DERATED LINEARLY TO 0.1 W @ 125°C) 0.1KW(Peak) (5μS PULSE WIDTH WITH 0.5% DUTY CYCLE)
Durability:	500 Cycles
Temperature:	-55~125°C

MATERIAL LIST

Part	Material	Plated
Body	Stainless Steel	Passivated
Center Conductor	Beryllium Copper	Gold
Insulator	PEI	
Coupling Nut	Stainless Steel	Passivated
Resistance	Beryllium Oxide	

OUTLINE DRAWING

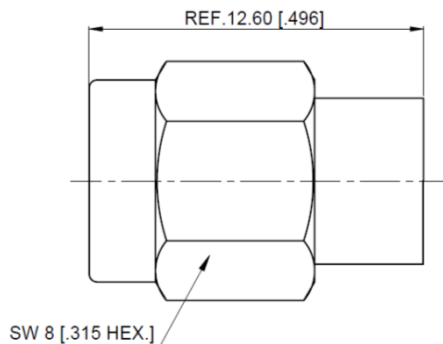

Unit:mm(inch)

TESTING DATA (100% S-PARAMETER TESTED)

