



**2402-2494MHZ NOTCH FILTER
WITH N FEMALE CONNECTORS
P/NO.STI15-9740**



SPECIFICATION


Rejection Band	2402-2494MHz
Notch Depth	50dB min.
Passband	DC-2385MHz,2500-5830MHz
Insertion Loss	DC-2385MHz,2510-5830MHz:2.0dB max. 2500-2510MHz:4.0dB max.
Return Loss	9.5dB min.
Power Handling	20W
Impedance	50 Ohm
Operating Temperature	+ 15~+ 30℃
Connector Type	N Female

MATERIAL LIST

Part	Material	Plated
Housing	Aluminum	
Connector Body	Stainless Steel	
Center Contact	Barss	Gold

OUTLINE DRAWING

Unit:mm

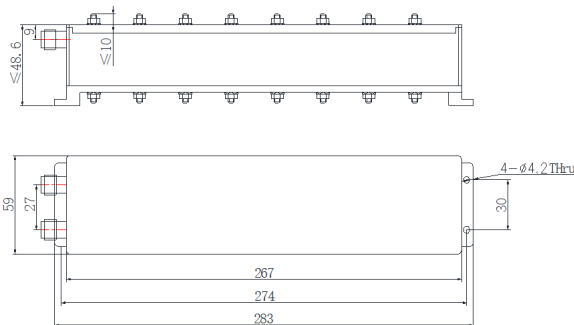

TESTING DATA (100% S-PARAMETER TESTED)

