



**5470-5725MHZ NOTCH FILTER
WITH SMA FEMALE CONNECTORS
P/NO.STI15-9881**



SPECIFICATION


Rejection Band	5470-5725MHz
Notch Depth	70dB min.
Passband	DC-5320MHz,5875-12000MHz
Insertion Loss	3.5dB max.
Return Loss	9.5dB min.
Power Handling	10W
Impedance	50 Ohm
Operating Temperature	0~+55℃
Connector Type	SMA Female

MATERIAL LIST

Part	Material	Plated
Housing	Aluminum	
Connector Body	Stainless Steel	
Center Contact	Barss	Gold

OUTLINE DRAWING

Unit:mm

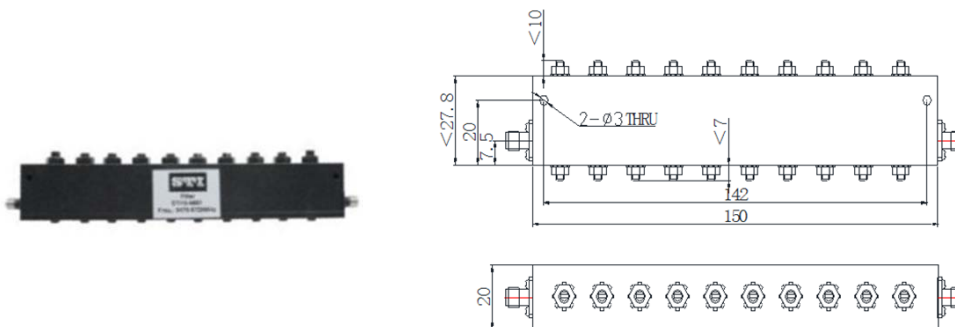

TESTING DATA (100% S-PARAMETER TESTED)

