



**DC-5500MHZ LOWPASS FILTER
WITH SMA FEMALE CONNECTORS
P/NO.STI15-9882**



SPECIFICATION


Pass Band	DC-5500MHz
Insertion Loss	2.0dB max.
Return Loss	10dB min.
Rejection	40dB min.@6000-16000MHz
Power Handling	10W
Impedance	50 Ohm
Operating Temperature	0~+ 55℃
Connector Type	SMA Female

MATERIAL LIST

Part	Material	Plated
Housing	Aluminum	
Connector Body	Stainless Steel	
Center Contact	Beryllium Copper	Gold

OUTLINE DRAWING

Unit:mm

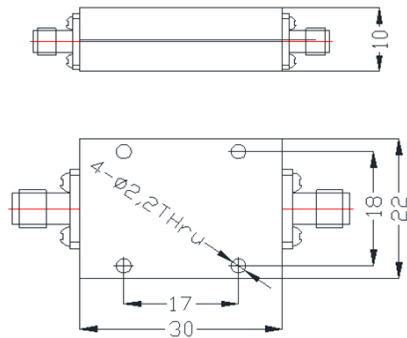

TESTING DATA (100% S-PARAMETER TESTED)

