



**2400-2500MHZ NOTCH FILTER
WITH SMA FEMALE CONNECTORS
P/NO.STI15-9902**



SPECIFICATION


Rejection Band	2400-2500MHz
Notch Depth	40dB min.
Passband	DC-2300MHz,2600-13000MHz
Insertion Loss	2.0dB max.
Return Loss	10dB min. (8dB min @6-13GHz)
Power Handling	20W
Impedance	50 Ohm
Operating Temperature	0~+ 55℃
Connector Type	SMA Female

MATERIAL LIST


Part	Material	Plated
Housing	Aluminum	
Connector Body	Stainless Steel	
Center Contact	Barss	Gold

OUTLINE DRAWING

Unit:mm

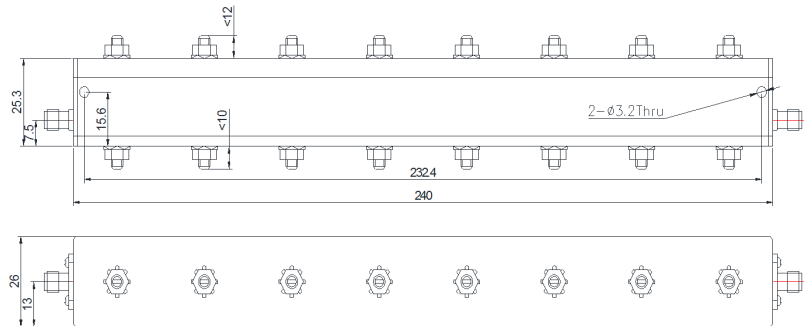

TESTING DATA (100% S-PARAMETER TESTED)

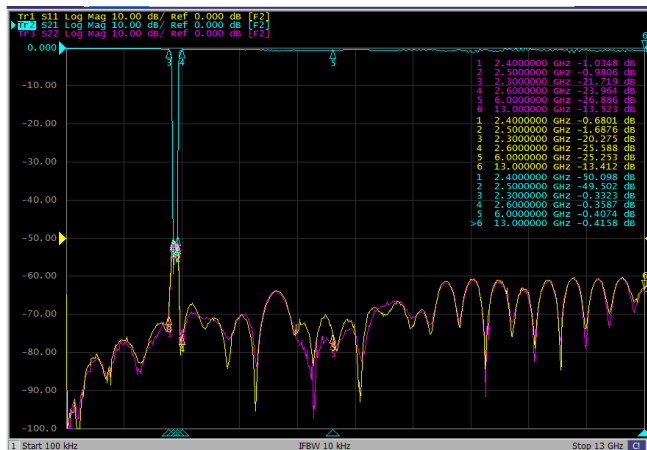

Any more request, please contact sales@solvangtech.com. Thank you ~