



**5150-5850MHZ NOTCH FILTER
WITH SMA FEMALE CONNECTORS
P/NO.STI15-9935**



SPECIFICATION


Rejection Band	5150-5850MHz
Notch Depth	50dB min.
Passband	DC-5000MHz ,6000-18000MHz
Insertion Loss	3.0dB max.@DC-5000MHz,6000-15000MHz 3.2dB max.@15000-18000MHz
Return Loss	10dB min.@DC-5000MHz,6000-8000MHz 5dB min.@8000-18000MHz
Power Handling	5W
Impedance	50 Ohm
Operating Temperature	0~+ 55°C
Connector Type	SMA Female

MATERIAL LIST

Part	Material
Housing	Aluminum
Connector Body	Stainless Steel
Connector Contact	Barss

OUTLING DRAWING

Unit:mm

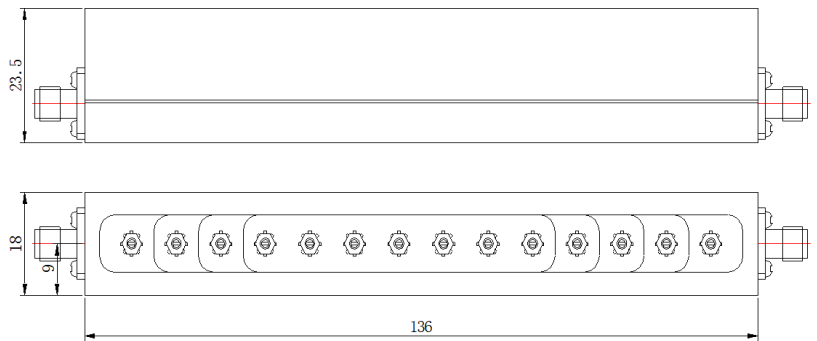

TESTING DATA (100% S-PARAMETER TESTED)

